



Portable energy storage power supply
special plug-in type fast recovery bridge

Product Introduction

Product Features

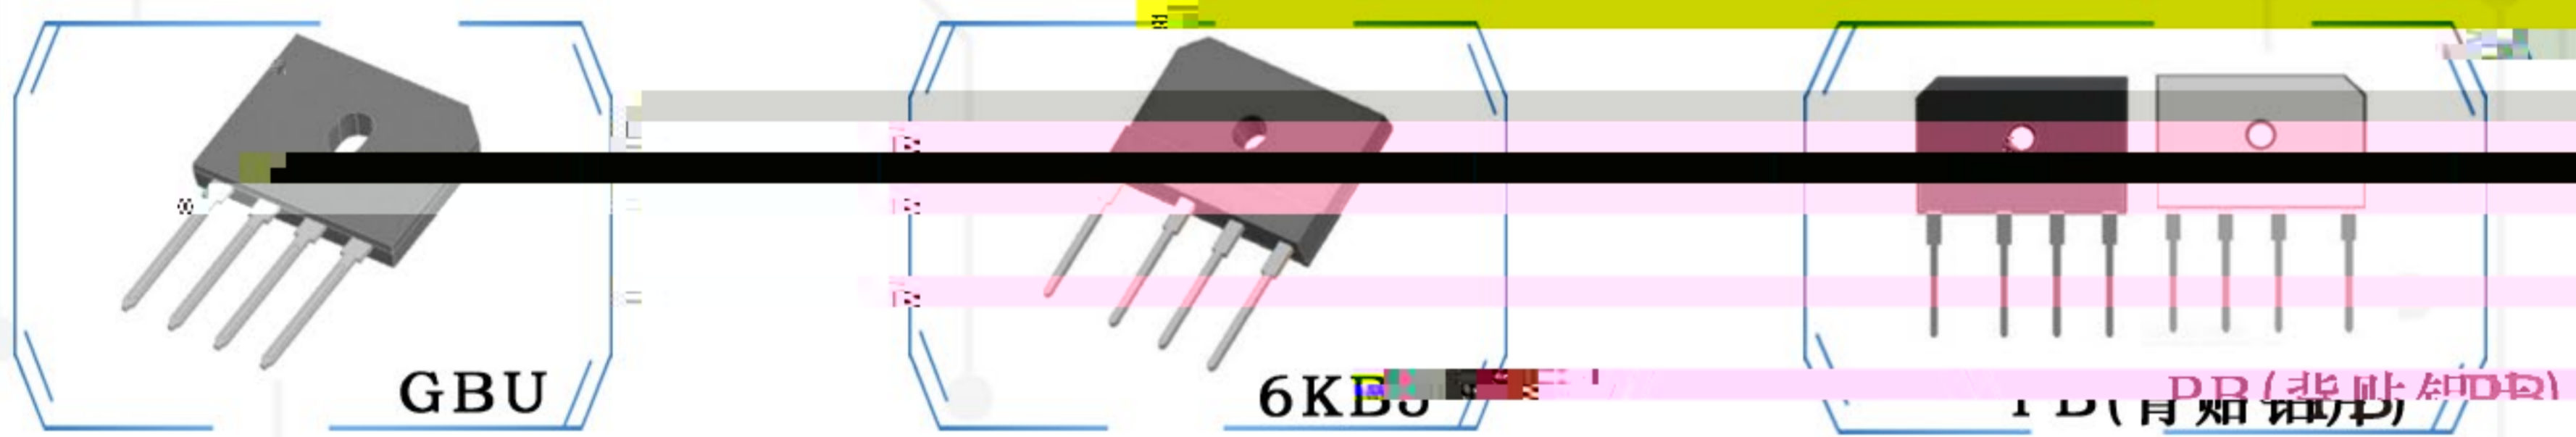

Yangjie adopts the deep DM mode and has its own wafer design and manufacturing facility. We have internally packaged Photo Glass process chips, with three layers of passivation protection, and stable high temperature characteristics and reliability capabilities. We can cooperate with customers to develop specific products for specific application scenarios, so as to achieve rapid development and timely delivery.

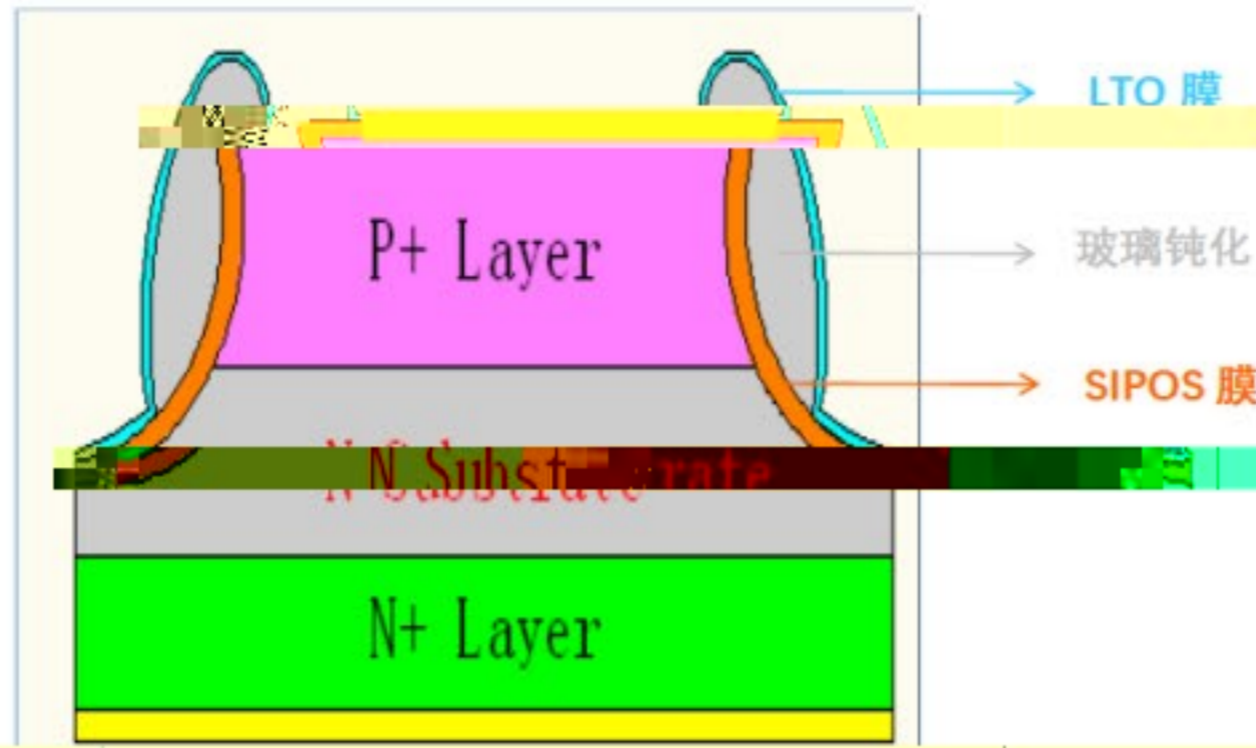

Electrical Parameters

Part NO.	V_{RRM} (V)	I_o (A)	I_{FSM} (A)	T_{Kated} (°C)	V_T (V)	I_R (uA)@25°C	I_R (uA)@125°C	T_{Jmax} (°C)	Package	
EGBU606	600	6	135	3	1.5	5	100	35	-55~+150	GBU
EGBU1006	600	10	175	5	1.7	5	100	35	-55~+150	GBU
EGBU1506	600	15	180	7.5	2	5	100	35	-55~+150	GBU
EGBU2006	600	20	180	10	2	5	100	35	-55~+150	GBU
EGBU2506	600	25	220	12.5	2	5	100	35	-55~+150	GBU
EGBU3006	600	30	320	15	2	5	100	50	-55~+150	GBU
EGBU3506	600	35	350	17.5	2	5	100	50	-55~+150	GBU
EGBU5006	600	50	380	25	2	5	200	50	-55~+150	GBU
EGBJ1006	600	10	175	5	1.7	5	100	35	-55~+150	6KBJ
EGBJ1506	600	15	180	7.5	2	5	100	35	-55~+150	6KBJ
EGBJ2006	600	20	180	10	2	5	100	35	-55~+150	6KBJ
EGBJ2506	600	25	220	12.5	2	5	100	35	-55~+150	6KBJ
EGBJ3506	600	35	350	17.5	2	5	100	50	-55~+150	6KBJ
EGBJ5006	600	50	380	25	2	5	200	50	-55~+150	6KBJ
EPB2506	600	25	220	12.5	2	5	100	35	-55~+150	PB
EPB3506	600	35	350	17.5	2	5	100	50	-55~+150	PB
EPB5006	600	50	380	25	2	5	200	50	-55~+150	PB

Please Refer To The Official Website

Application

