


2-Line un-directional TVS Diode Array

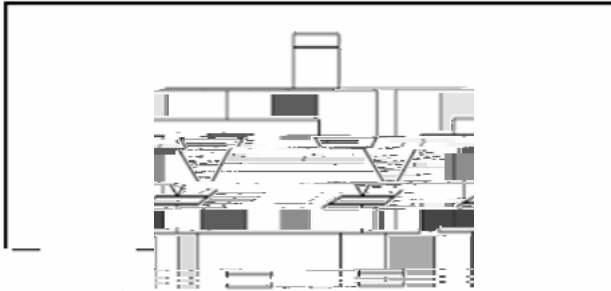


Features

- 320W peak pulse power (8/20 μ s)
- Clamping voltage: nA level
- Operating voltage: 5V
- Low clamping voltage
- RoHS Compliant

Mechanical Characteristics

- Package: SOT-23
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below



Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Operating Temperature Range	T _J	-55 to +125	
Storage Temperature Range	T _{STG}	-55 to +150	
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	KV
ESD per IEC 61000-4-2 (Contact)		±30	KV
Peak Pulse Power(8/20 μ s)	P _{PK}	320	W
Peak Pulse Current(8/20 μ s)	I _{PP}	23	A

Electrical Characteristics Ta=25 Unless otherwise specified


PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Working Voltage	V _{RWM}	V				5
Reverse Leakage Current	I _R	μ A	V _{RWM} =5V any I/O pin to ground			0.5
Forward Voltage	V _F	V	I _F =10mA	0.2	0.8	1.2
Breakdown Voltage	V _(BR)	V	I _T =1mA	6		
Clamping Voltage	V _C	V	I _{PP} =1A (8 x 20 μ s pulse) any I/O pin to ground			8
Clamping Voltage	V _C	V	I _{PP} =23A (8 x 20 μ s pulse) any I/O pin to ground			14
Junction Capacitance	C _J	pF	V _R =0V, f=1MHz, any I/O pin to ground		160	




Thermal Characteristics $T_a=25$



ASM05



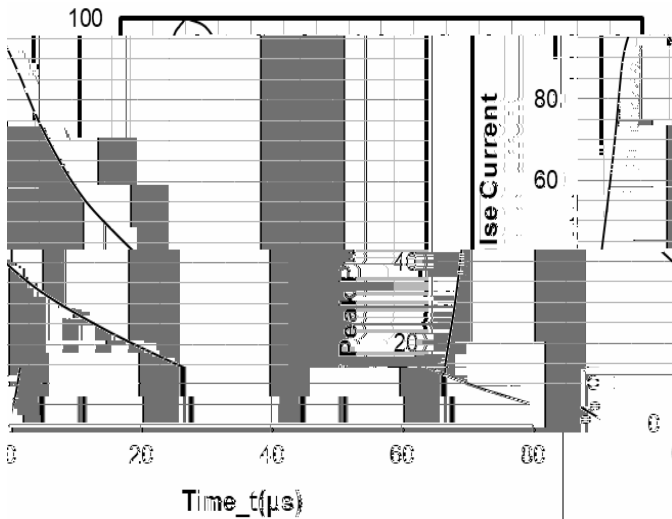


8 X 20μs Pulse Waveform

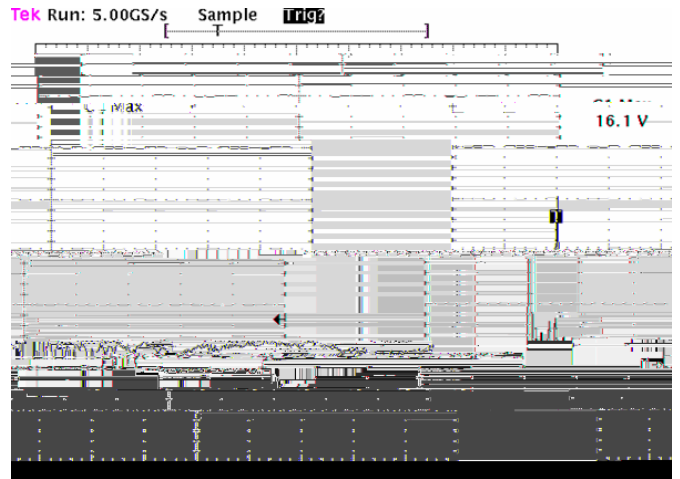


Note Data is taken with a 10x attenuator
ESD Clamping Voltage
8 kV Contact per IEC61000-4-2

Outline Dimensions

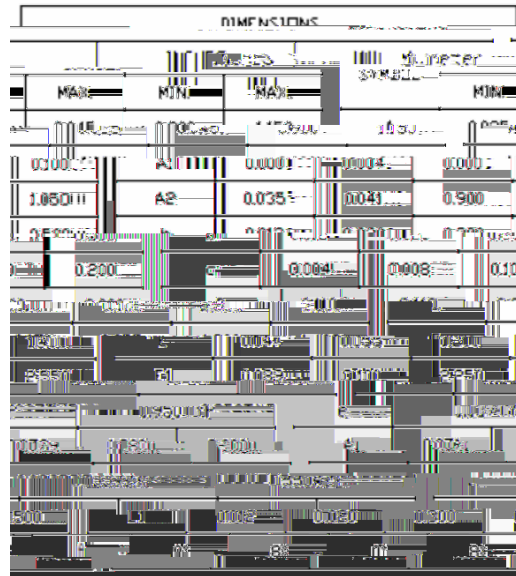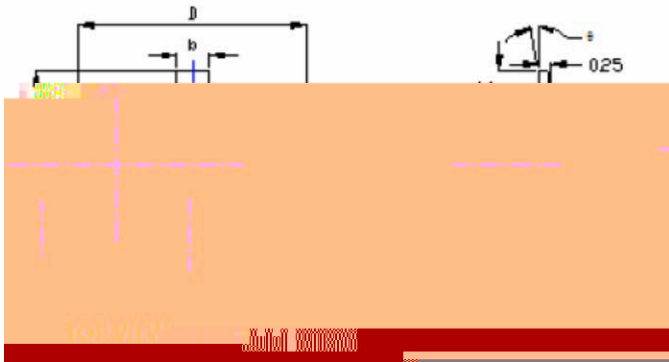

Soldering Footprint





ASM05

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.