

FRED Modules

V_{RRM} 600V
I_{FAV} 200 A


Applications

Inversion Welder
 Uninterruptible Power Supply (UPS)
 Plating Power Supply
 Ultrasonic Cleaner and Welder
 Power Factor Correction (PFC) Circuit
 Converter & Chopper

Features

Soft Reverse Recovery Characteristics
 Ultrafast Reverse Recovery Time
 Low Reverse Recovery Loss
 Low Forward Voltage
 High Surge Current Capability
 Low Inductance Package

Circuit

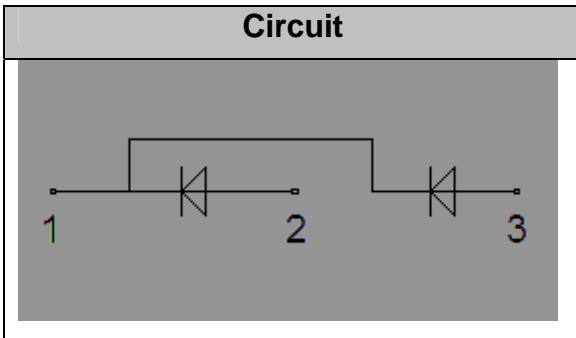

Maximum Ratings

Symbol	Conditions	Values	Units
V _R		600	V
V _{RRM}		600	V
I _{F(AV)}	T _C =110°C, Per Diode	200	A
	T _C =120°C, 20KHz, Per Module	300	A
I _{F(RMS)}	T _C =110°C, Per Diode	280	A
I _{FSM}	1/2 Cycle, 50Hz, Sine	2000	A
	1/2 Cycle, 60Hz, Sine	2200	A
I ² t	T _J =45°C, t=10ms, 50Hz, Sine	20000	A ² s
	T _J =45°C, t=8.3ms, 60Hz, Sine	24200	A ² s
P _D		690	W
Visol	AC, Ton=1min	3000	V
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Torque	Recommended M6	5±15%	N·m
Torque	Recommended M6	5±15%	N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per Module	0.18	/W



Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=600V$	--	--	0.5	mA
	$V_R=600V, T_J=125^\circ C$	--	--	3	mA
V_F	$I_F=200A$	--	1.15	1.6	V
	$I_F=200A, T_J=125^\circ C$	--	0.9	1.25	V
t_{rr}	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$				

Performance Curves

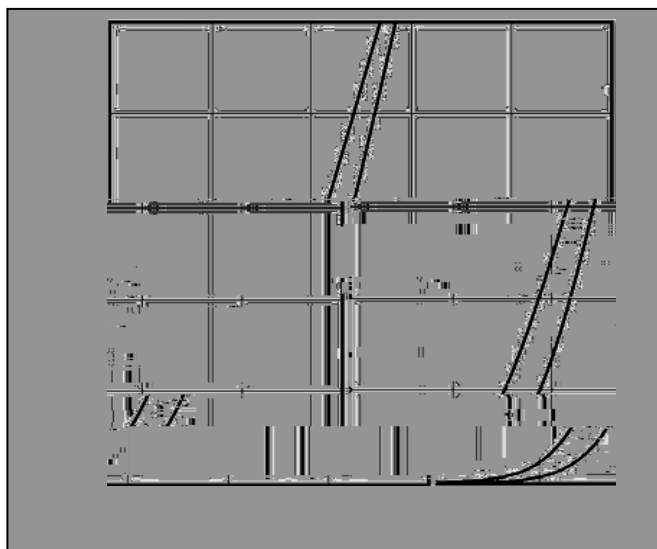


Fig1. Forward Voltage Drop vs Forward Current

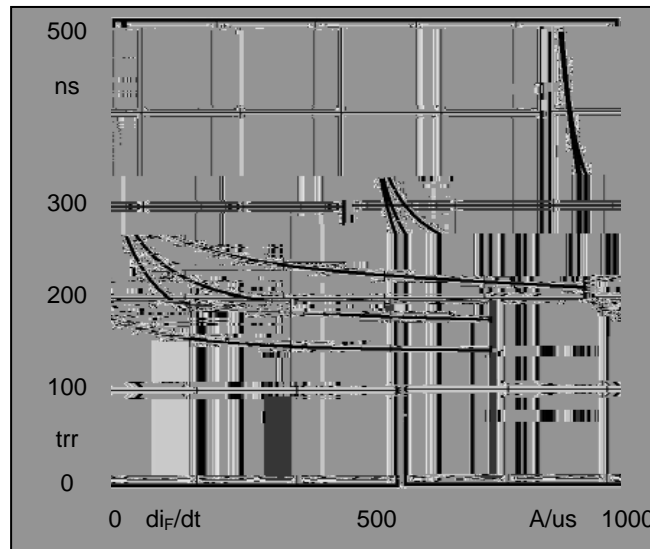


Fig2. Reverse Recovery Time vs di_F/dt

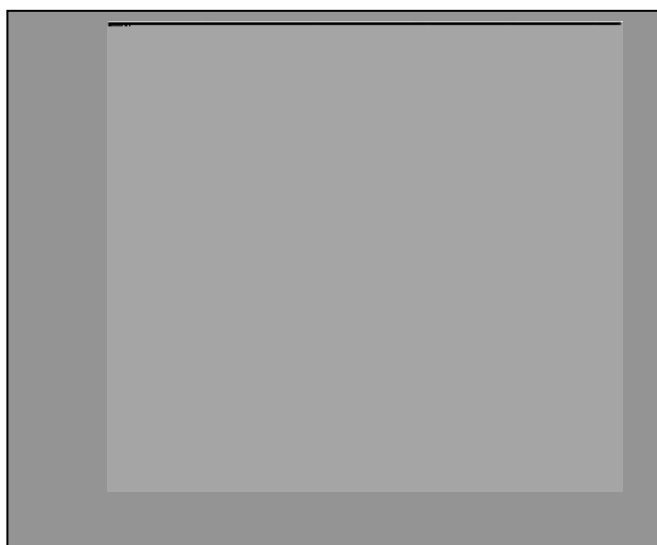


Fig3. Reverse Recovery Current vs di_F/dt


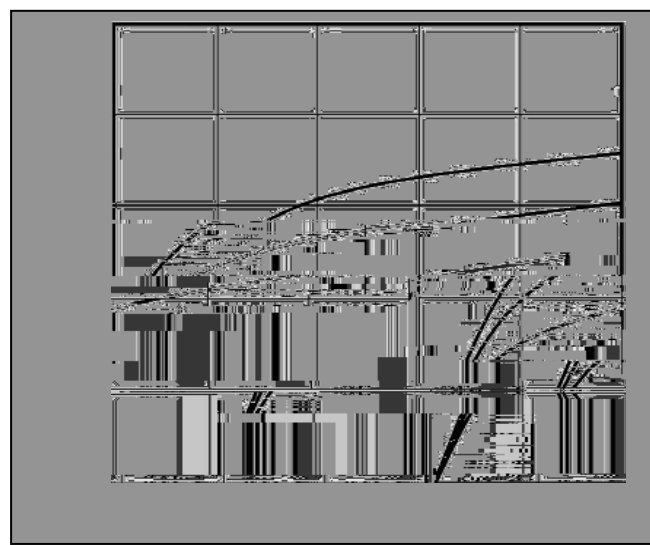


Fig4. Reverse Recovery Charge vs di_F/dt



Package Outline Information

CASE: F2

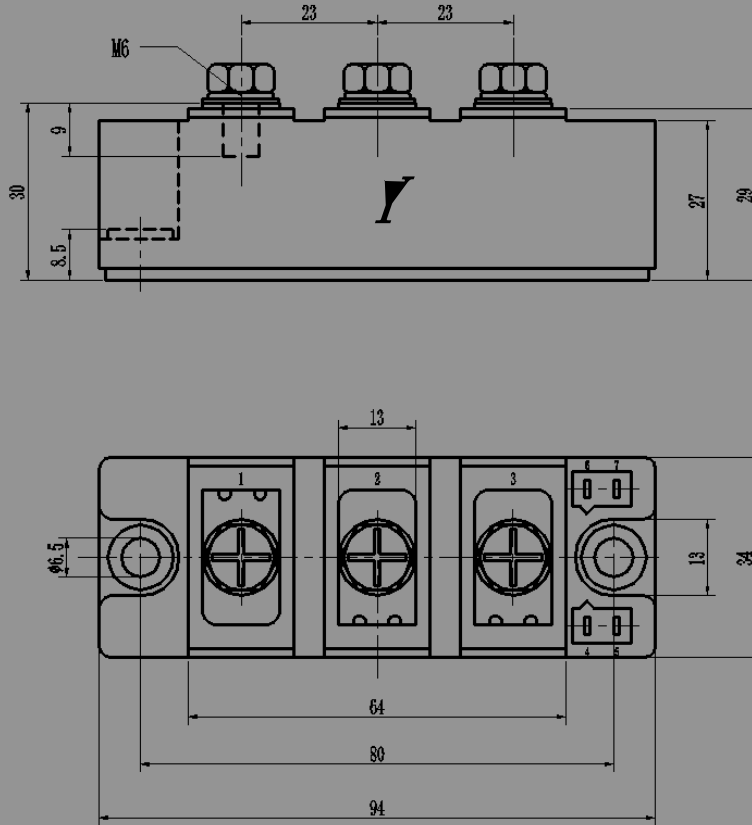

Dimensions in mm