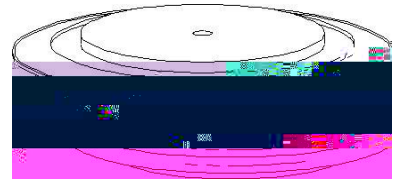

D10C

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 3600 volts
- . Ceramic housing hermetic package
- . Pressure assembled device



Reverse Engineering

$$V_{RSM} = \text{Non repetitive peak reverse voltage (2)}$$

cu_{QW} **L**

10. b9C b7D CM BC... 15. b9C b7D CM 108A b7D A
16. G III

Г. И. БУБЕНОВ СМЗЛС. Г. И. БУБЕНОВ

$$\Gamma \in \mathcal{D} \Rightarrow \mathcal{M} \cap \Gamma$$

ГДЕ-ТО • 2 ВО Б 9 16 •

D-Cell Division, Department of Defense, Washington, DC 20301; e-mail: daniel.hayman@ddm.mil

