



2- Line, Bi-directional, ESD protection diode

Features @ @ (á ¢ € ` R 5 q Å Å 0

±30kV contact, ±30kV air
A(tp=8/20µs)

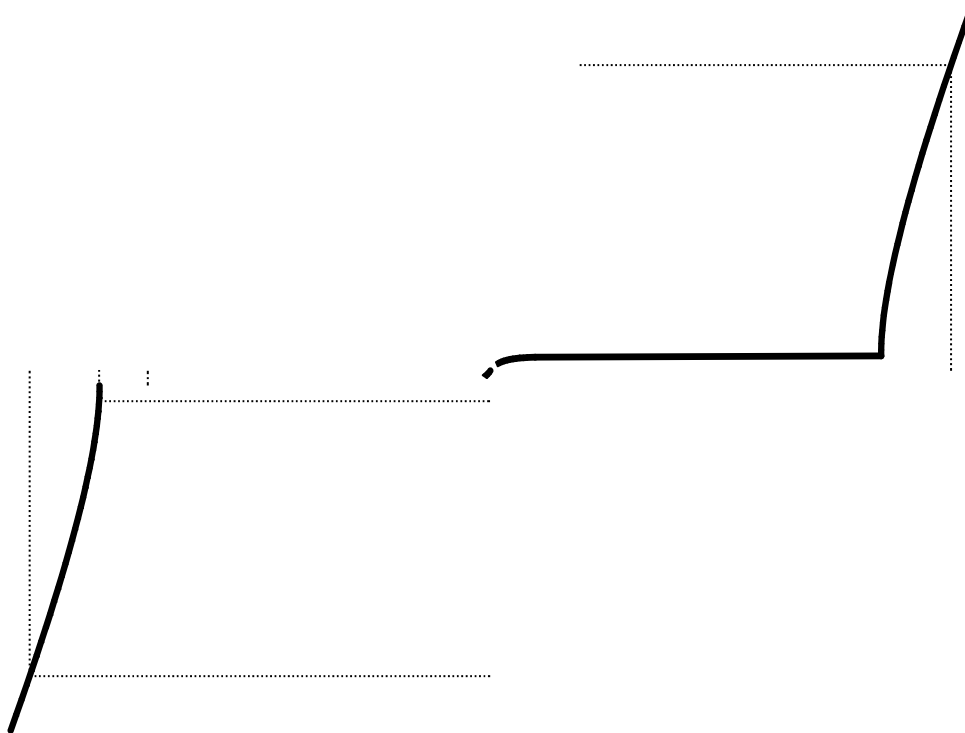

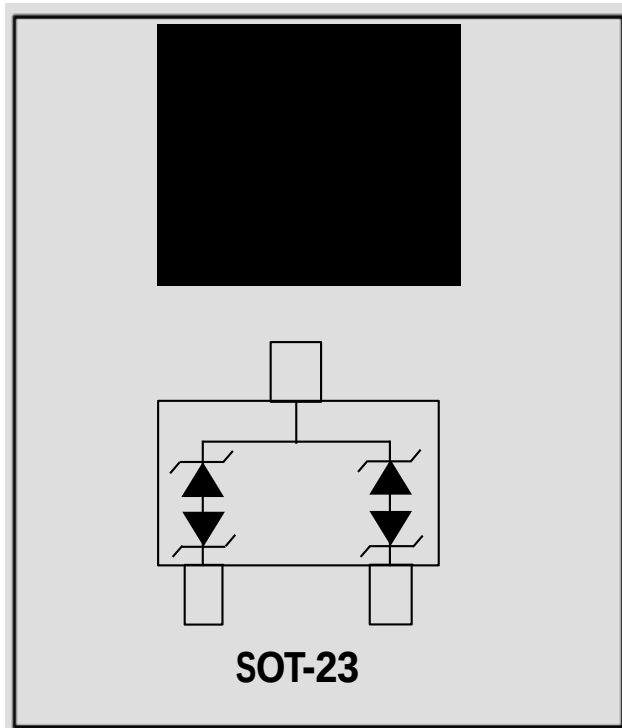

ESD0502EBSQ

Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
-----------	--------	--------	------



Outline Dimensions

Marking Information

5BS.



