





1N4448WT

RoHS
COMPLIANT

Small-Signal Fast Switching Diodes

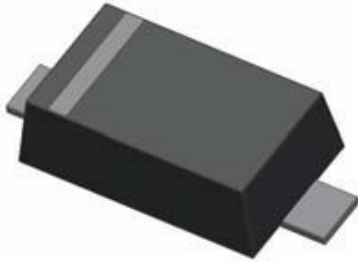

Features

- VR 75V
- I_FAV 250mA

Typical Applications

- Ex m D I X I M 3 p T m M T b itches

Mechanical Data

- **Package:** SOD523
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end
- **Marking:** E2

■Maximum Ratings (T_a=25 Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	VALUE	
Non-Repetitive Peak Reverse Voltage	VRM	V		100	
Repetitive peak reverse voltage	V _{RRM}	V		75	
Reverse voltage	V _R	V	IR=100uA	75	
Peak forward surge current	I _{FSM}	A	Pulse width=1 us Pulse width=1 s	2 0.5	
Average forward current	I _{FAV}	mA		250	
Power dissipation	P _{tot}	mW		150	
Max	®				
	Symbol	UNIT	Conditions	Min	Max
Breakdown Voltage	V _R	V	IR=5uA	75	
Forward Voltage	V _F	V	IF=5mA	0.62	0.72
			IF=10mA		0.855
			IF=100mA		1.00
			IF=150mA		1.25
Reverse Leakage Current	I _{R1}	nA	VR=20V		25
	I _{R2}	uA	VR=75V		2.5
Capacitance	C	pF	VR=0V,f=1MHz		4
Reverse Recovery Time	T _{rr}	ns	IF=IR=10mA ĖI _{rr} =0.1*IR, RL=100Ω		4
	1 / 4				




1N4448WT

■ Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1N4448WT	F2	Approximate 0.002	8000	80000	320000	7" reel

■ Characteristics (Typical)

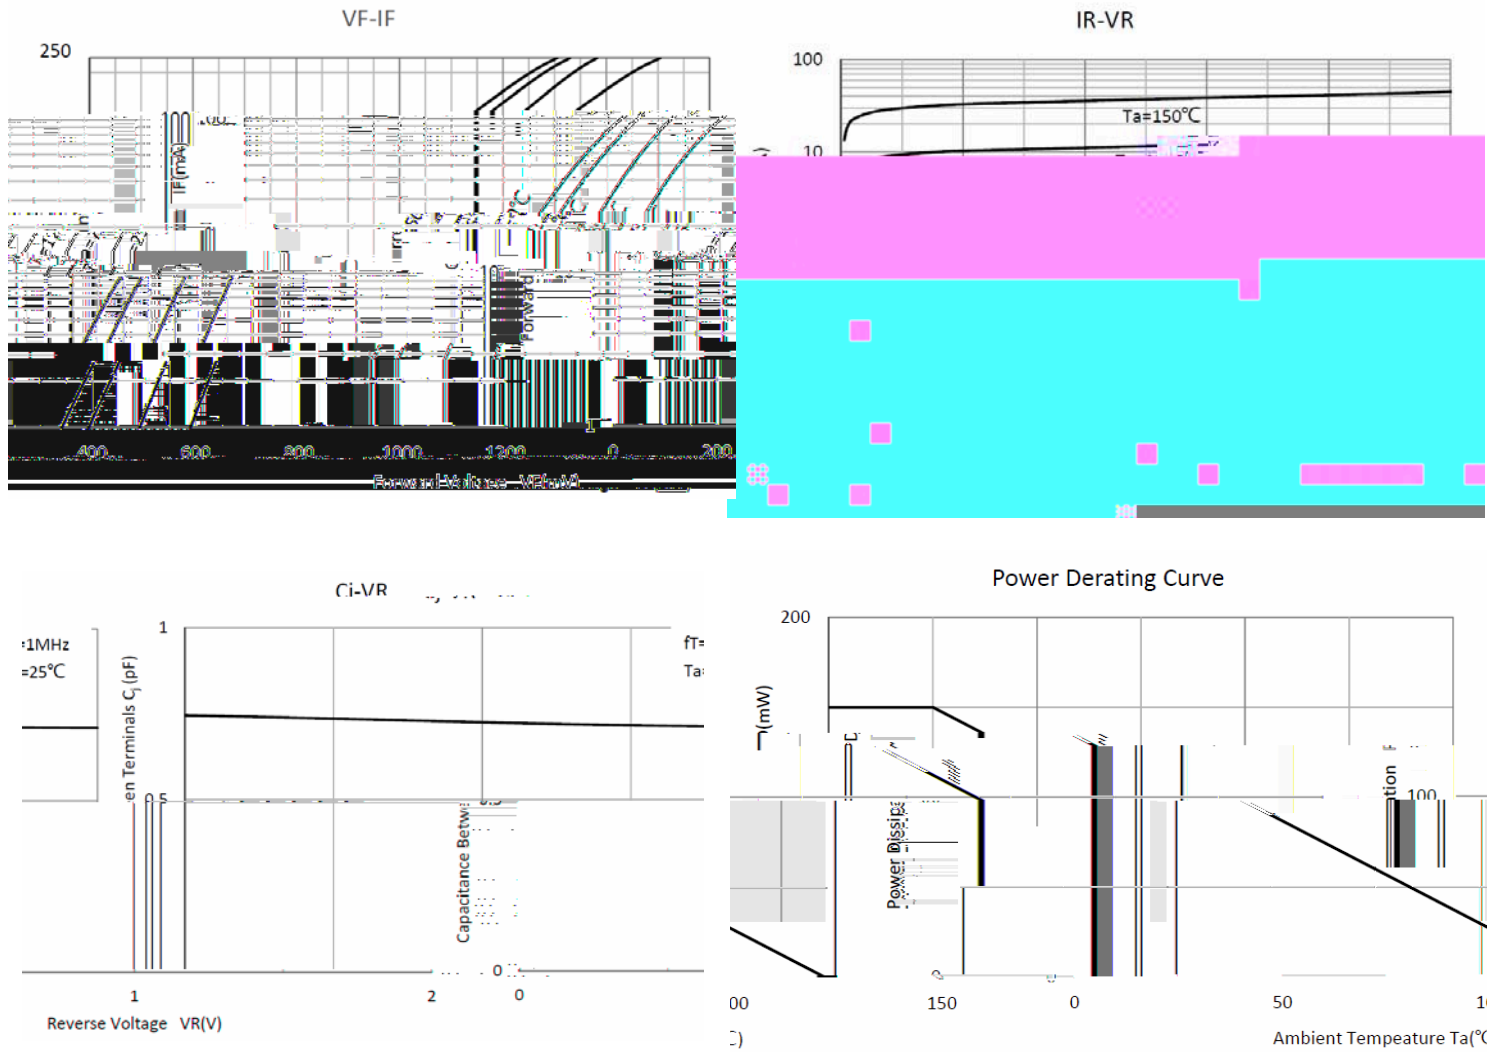




■ Outline Dimensions

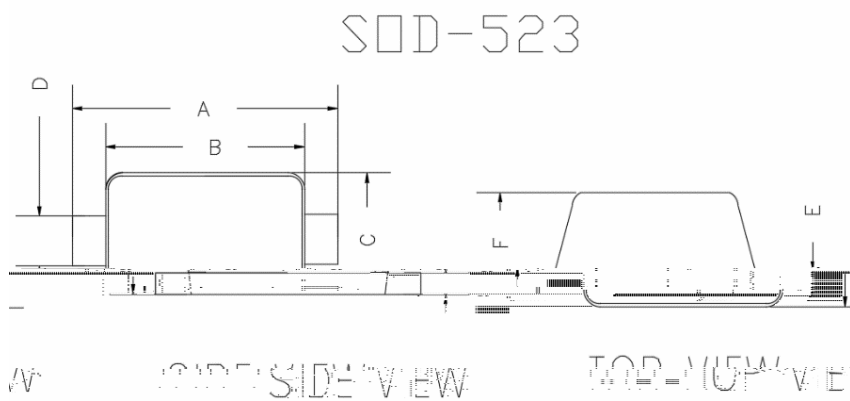

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.500	1.700
B	0.043	0.051	1.100	1.300
C	0.008	0.014	0.250	0.350
D	0.002	0.008	0.050	0.200
E	0.028	0.300	0.700	7.62
F	0.010	0.014	0.250	0.350

■ Soldering Footprint

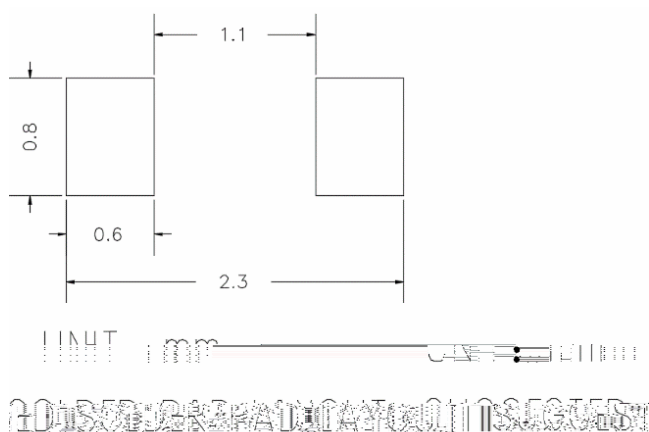



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.