


Dual Switching Diode

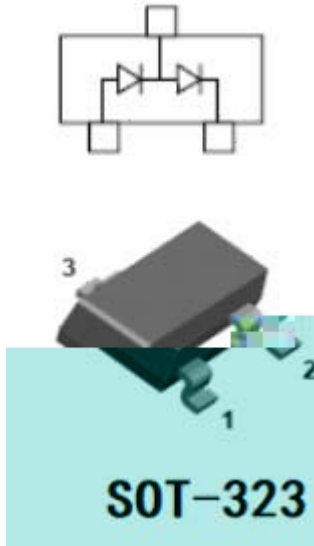

Features

- Moisture sensitivity level 1
- Reverse voltage 75V
- Average forward current 150mA

Application

- Signal switching
- High frequency rectifier

Mechanical data

- Package** SOT-323
- Terminals** Tin plated leads, solderable per J-STD-002 and JESD22-B102

Maximum Ratings (T_a=25 °C Unless otherwise specified)

Parameter ^a	Symbol	Unit	Value
Reverse recovery time	t _{RRM}	ns	15
Forward current per leg	I _F	mA	150
Non-repetitive surge peak forward current 10ms half-sine wave	I _{FSM}	A	2
Non-repetitive surge peak forward current 1ms square wave			2
Power dissipation	P	mW	200
Operating junction temperature	T _J	°C	-55 to +150
Storage temperature	T _{STG}	°C	-55 to +150



Parameter	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse voltage	V_R	V	$I_R=100\mu A$	75		
Forward voltage	V_{F1}	V	$I_F=1mA$			0.715
	V_{F2}	V	$I_F=10mA$			0.855
	V_{F3}	V	$I_F=50mA$			1
	V_{F4}	V	$I_F=150mA$			1.25
Reverse leakage current	I_R	μA	$V_R=75V$			2.5
Junction capacitance	C_j	pF	$V_R=0V, f=1MHz$			2
Reverse recovery time	T_{rr}	ns	$I_F=I_R=10mA$ $I_{rr}=0.1 \cdot I_R,$ $R_L=100$			4


Parameter	Symbol	Unit	
-----------	--------	------	--



Characteristics

Fig 1 Pb-Ta Cu

Fig 3 Typical Forward C

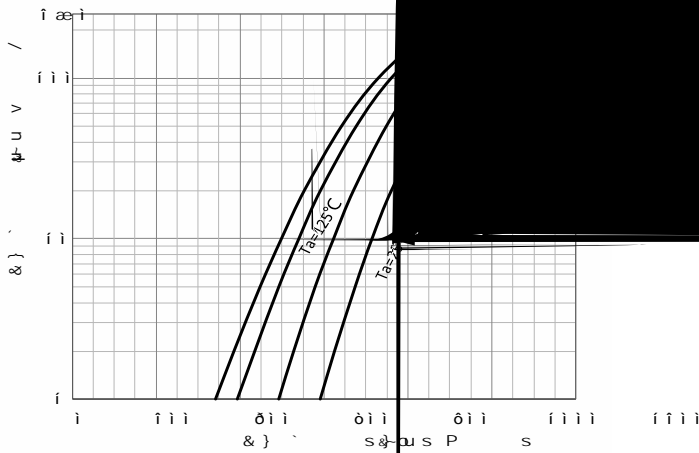



BAV99WT

RoHS
COMPLIANT

Ordering Information

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity (pcs)	Delivery mode
BAV99WT	F2	Approximate 0.005	3000	30000	120000	7" reel

Outline Dimensions

Suggested Pad Layout



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves q á "