

Epoxy meets UL-94 V-0 flammability rating
Moisture Sensitivity Level 1
Marking: K3T

Collector-Base Voltage	V_{CBO}	V		-40
Collector-Emitter Voltage	V_{CEO}	V		-40
Emitter-Base Voltage	V_{EBO}	V		-5
Collector Current	I_C	A		-0.6
Collector Power Dissipation	P_C	W		0.2
Operation Junction Temperature	T_j			150
Storage Temperature	T_{stg}			-55 to +150

($T_a=25$ unless otherwise noted) μ Es s

	V_{CEO}	V	$I_C=-1mA, I_B=0$	-40	
Emitter-base breakdown voltage	V_{EBO}	V	$I_E=-100\mu A, I_C=0$	-5	
Collector-Base cut-off current	I_{CBO}	μ A	$V_{CB}=-35V, I_E=0$		-0.1
Collector-emitter cut-off current	I_{CEO}	μ A	$V_{CE}=-35V, I_B=0$		-0.1

		V	$I_C=-150mA, I_B=-15mA$		-0.4
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C=-150mA, I_B=-15mA$		-0.95



(Ta=25 unless otherwise noted)



Parameter	Symbol	Unit	Test Conditions	Value	Notes
Transition frequency	Ft	MHz	VCE=-10V, IC=-20mA, f=100MHz	200	
Delay time	td	ns	VCC=-30V, IC=-150uA VBE off =-2V IB1=-15mA		15
Rise time	tr	ns			
Storage time	ts	ns	VCC=-30V, IC=-150mA, IB1= IB2=-15mA		225
Fall time	tf	ns			

(Example)


Part Number	Package	Approximate Yield	Lot Size	Reel Size	Other Info
MMST4403	F2	Approximate 0.005	3000	30000	120000 7" reel

(Typical)

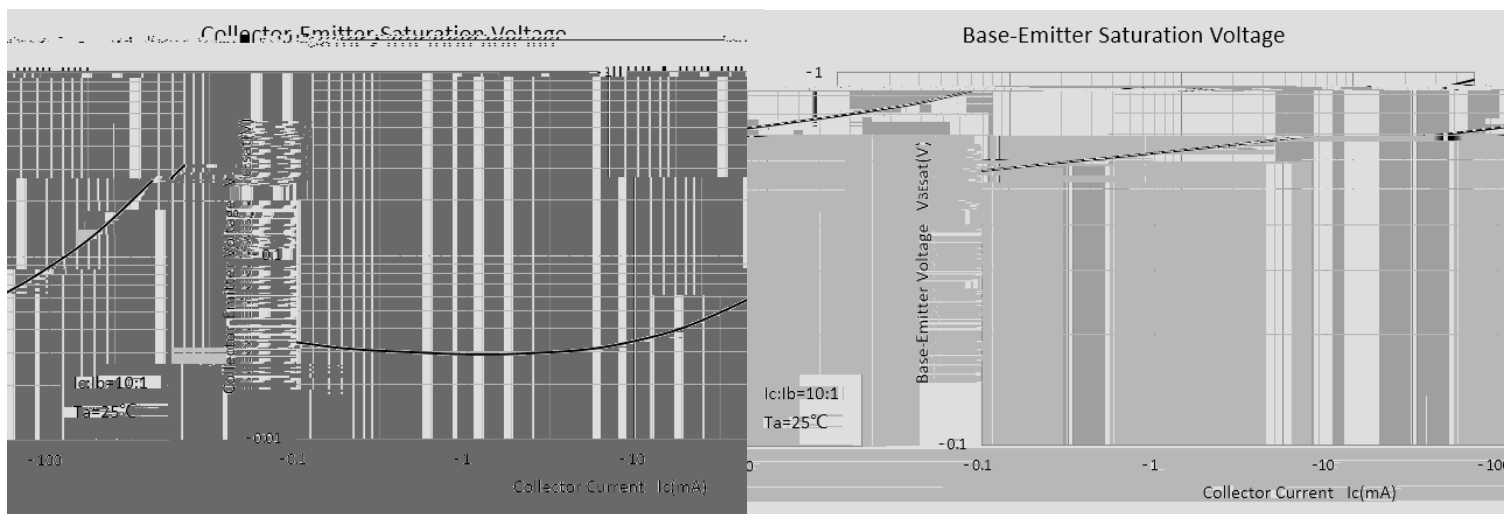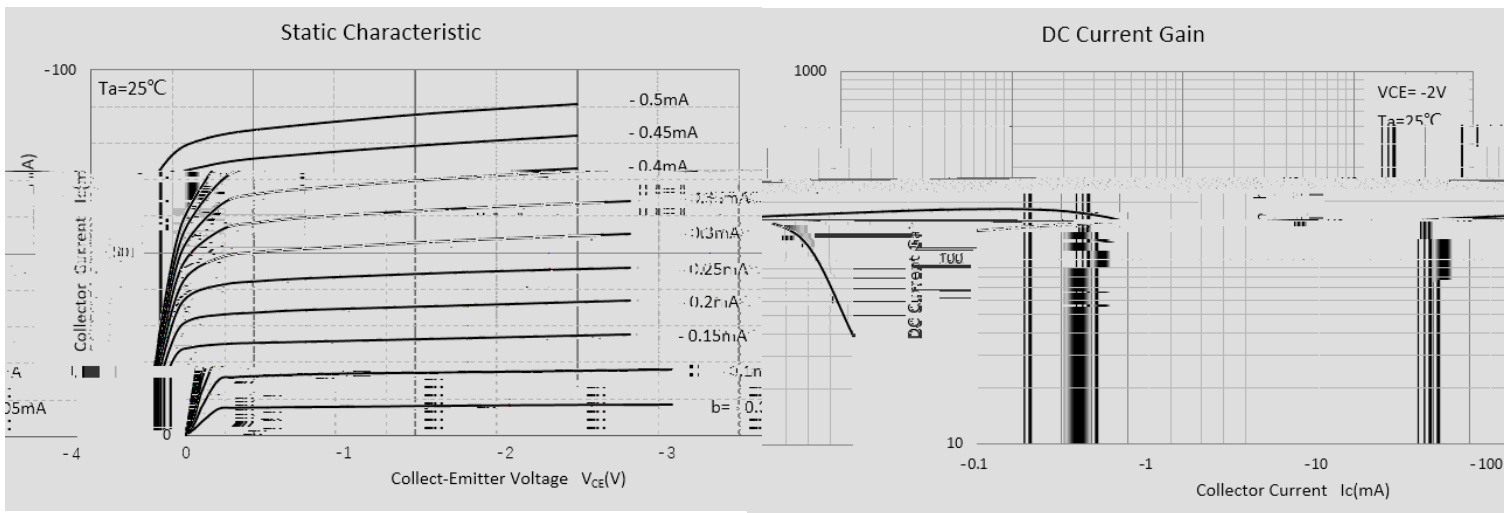

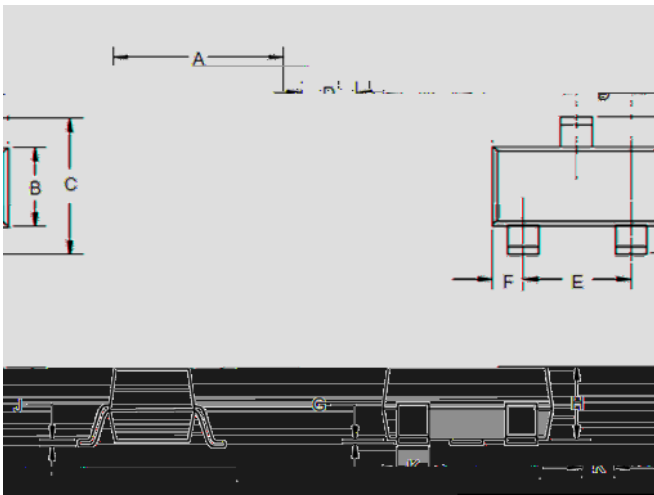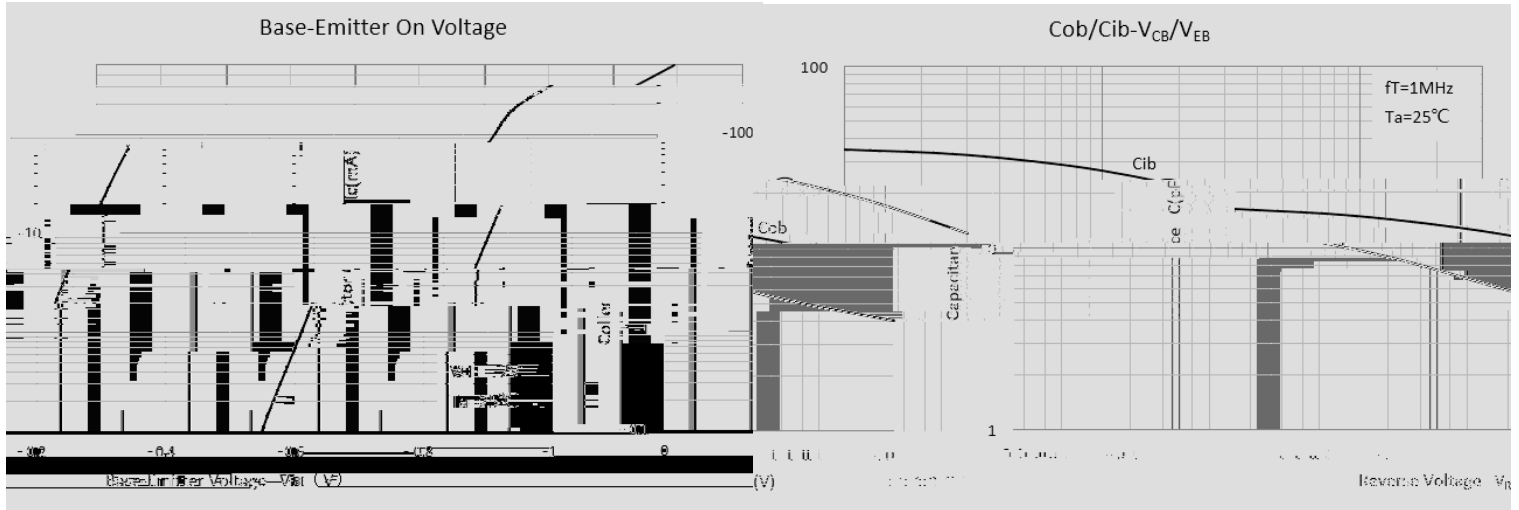

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.025	.033	0.65	0.85	
C	.025	.033	0.65	0.85	
D	.026 Nominal		0.65 Nominal		
F	.047	.055	1.20	1.40	
G	.010		0.25		
H	.035	.050	0.90	1.27	
J	.024	.030	0.60	0.76	

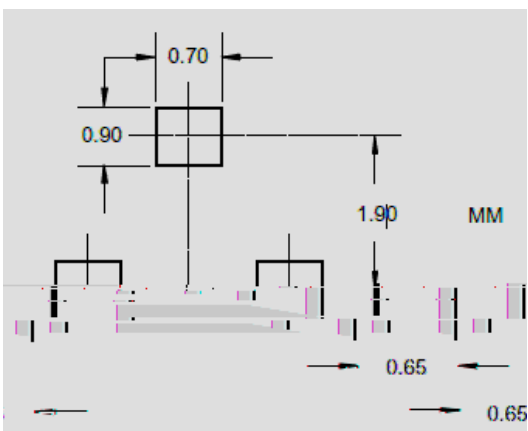



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.