


Digital Transistors (Built-in Resistors)

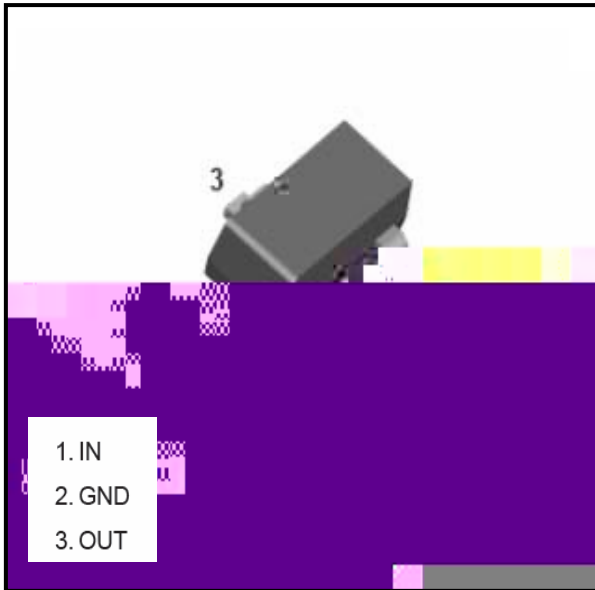


Features

- Epoxy meets UL-94 V-0 flammability rating
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- Surface mount package ideally Suited for Automatic Insertion
- PNP
- J-STD-002 and JESD22-B102

E13

Equivalent circuit

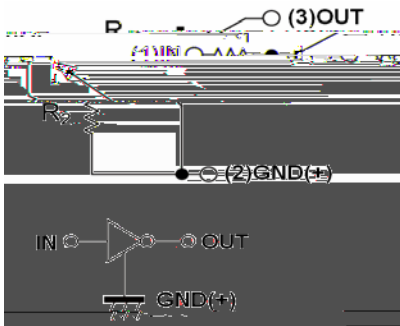

Maximum Ratings (Ta=25 Unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	VALUE
Supply Voltage	V_{CC}	V		-50
Input Voltage	V_{IN}	V		-30 to +5
Output Current	I_o	mA		-100
Power Dissipation	P_D	mW		200
Junction Temperature	T_J			150
Storage Temperature	T_{STG}			-55 to +150



DTA143ZCA

Electrical Characteristics (Ta=25 unless otherwise specified)

ITEM	SYMBOL	UNIT	CONDITIONS	MIN	TYP	
Input voltage	$V_{I(off)}$	V	$V_{CC}=-5V, I_c=-100\mu A$	-0.5		
	$V_{I(on)}$	V	$V_o=-0.3V, I_c=-2mA$			-1.3
Output voltage	$V_{O(on)}$	V	$I_o / I_i = -10mA / -0.5 mA$			-0.3
Input current	I_I	mA	$V_i=-5V$			-1.8
Output current	$I_{O(off)}$	μA	$V_{CC}=-50V, V_i=0$			-0.5
DC current gain	G_I		$V_o=-5V, I_o = -10mA$	80		
Input resistance	R_1	k		3.29	4.7	6.11
Resistance ratio	R_2/R_1			8	10	12
Transition frequency	fT	MHz	$V_{CE}=-10V, I_E=5mA, f=100MHz$		250	




Ordering Information (Example)

PREFERRED P/N



DTA143ZCA

Characteristics (Typical)

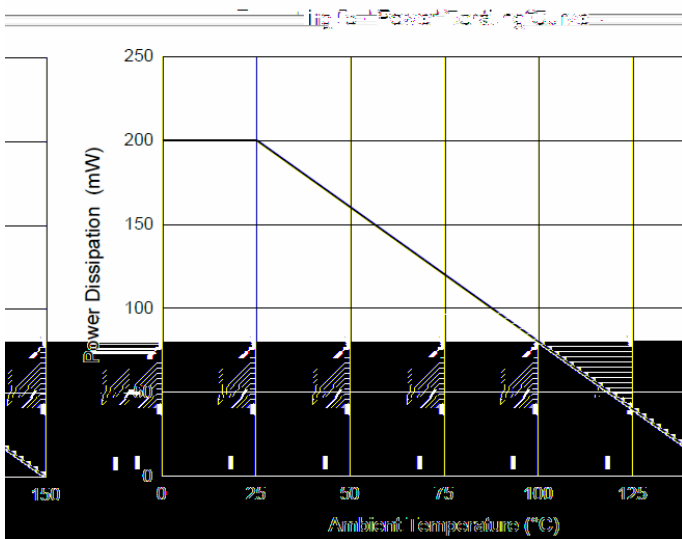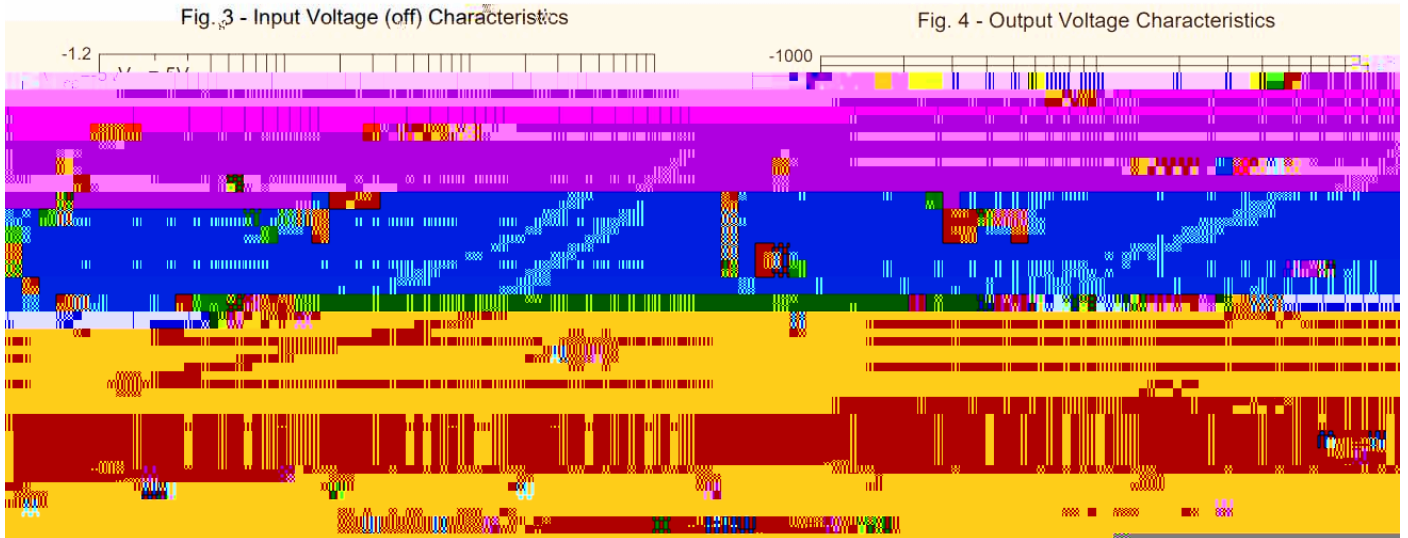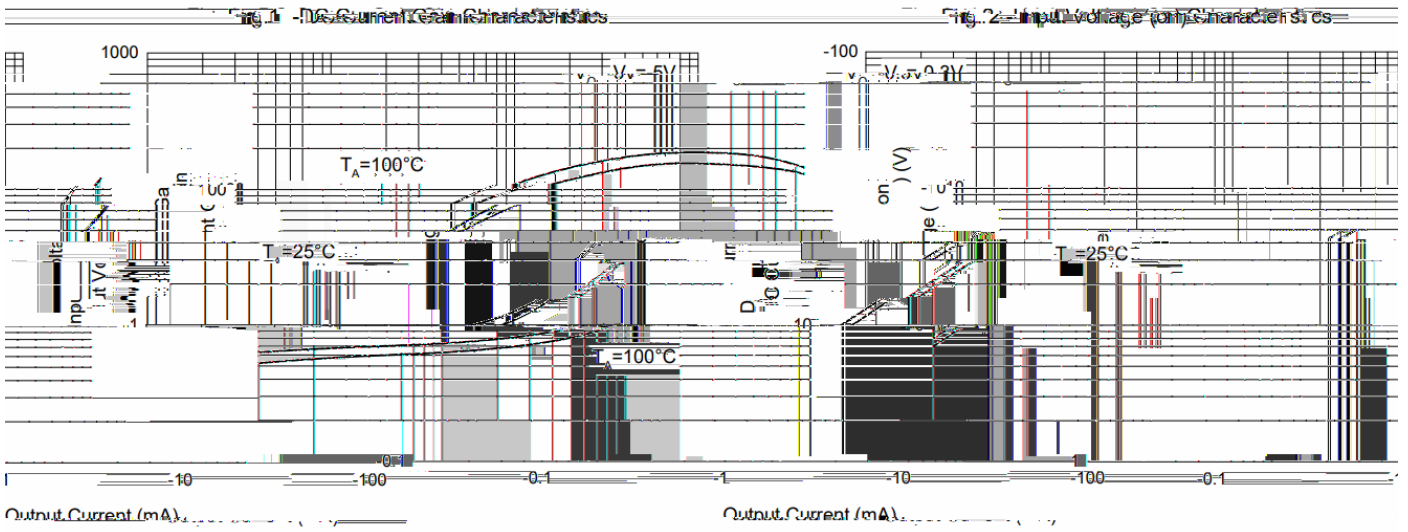





Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of t