



Ultra-Fast Recovery Diodes 5A FRED



Features

- " \$GRSW)5(' FKLS
- " /RZ IRUZDUG 9ROWDJH GURS
- ")DVW UHYHUVH UHFRYHU\ WLPH
- " +LJK IUHTXHQF\ RSHUDWLRQ
- " +LJK SXULW\ KLJK WHPHUDWXUH HSR[\ H
- HQKDQFHG PHFKDQDDEOPRWUMQUWUHVLVWD
- " *XDUG ULQJ IRU HQDWFBGUORJUGWHUP U

Typical Applications

- 7\SLFDO DSSOLFDWLRQV DUH LQ VZLWFKLQJ
- IUHHZKHHOLQJ GLRGHV DQG UHYHUVH EDW

Mechanical Data

- " Package ,72 \$&
- 0ROGLQJ FRPSRQG PHHWDPPDELOLW\
- UDWLQJ 5R+6 FRPSOLDQW
- " Terminals 7LQ SODTW@SÀ`À P /

		81,7	085)
'HYLFH PDUNLQJ FRGH			085)
5HSHWLWLYH 3HDN 5HYHUVH 9ROWDJH	9		
\$YHUDJH 5HFWLILHG 2XWSXW &XUUHQW # +] VLQH ZDYH 5 ORDG 7F), * 2	\$		
6XUJH 1RQ UHSHWLWLYH)RUZDUG &XUUHQW # +] KDOI VLQH ZDYH F\FOH 7M 960	\$		
&XUUHQW 6TXDUHG 7LPH # ÈV "W" PW 7M	\$ V		
6WRUDJH 7HPSHUDWXUH	7vWJ		a
-XQFWLRQ 7HPSHUDWXUH	7M		a
7\SLFDO -XQFWLRQ FDSDFLWDQFH #&M 0+	S)		
0RXQWLQJ WRUTXH #UHFRPPHQGÖWRJUFH	7RU	NJ FP	



MUR560F

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
QVWDQWDQHRXV IRUZDUG YROWDJH		GURS	\$ #7M			
'& UHYHUVH FXUUHQW DW UDWHG '& EORFNLQJ YROWDJH	550	SHU GLRGH	\$ #7M			
5HYHUVH 5HFRYHU\ 7LPH	55	QV	\$ 50, \$ 55			
3HDN UHFRYHU\ FXUUHQW	550	\$	\$ XV			
5HYHUVH UHFRYHU\ FKDUJH		Q&	4UU			

Thermal Characteristics


PARAMETER	SYMBOL	UNIT	MUR560F
7KHUPDO 5HVWUDQFH	Q DQG FDVH	:	5
%HWZHHQ MXQFWLRQ	Q DQG \$LU	:	5

Ordering Information ([DP SOH

REFERRED P/N	UNIT WEIGHT(g)	ple0




FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

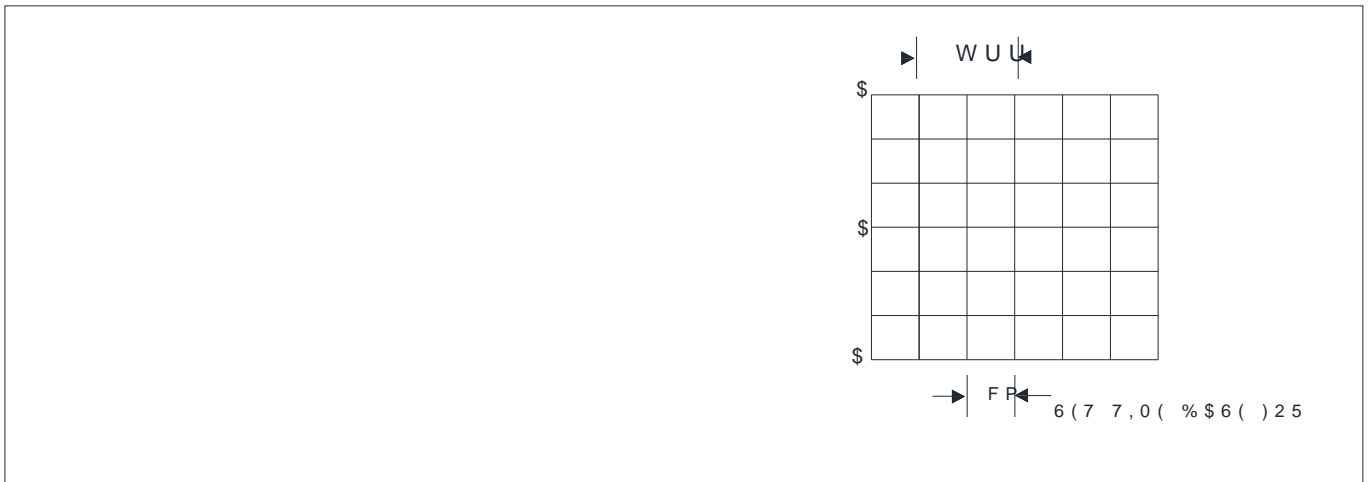



MUR560F

Outline Dimensions

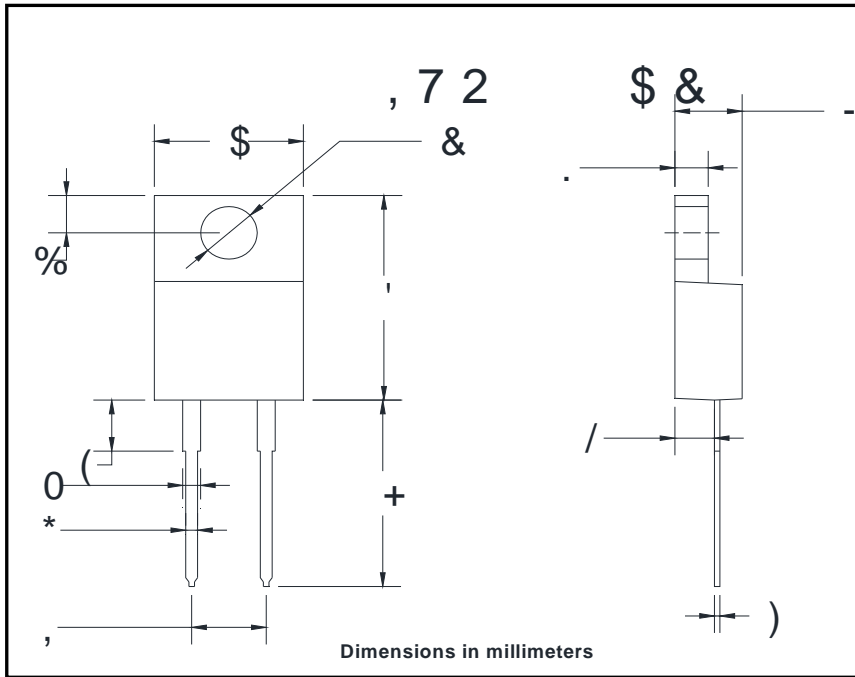

ITO-220AC		
'LP	0LQ	0D
\$		
%		
&		
'		
(
)		
*		
+		
,		
-		
.		
/		
0		



MUR560F

ÄDQ R

Disclaimer

7KH LQIRUPDWLRQ V GHVFHQWV LQ WKLV DOKUMENT (HÖRFOUR &LF /VHG UHV
ULJKW WR PDNLWKRDXWLRQV VSHFIRWV VSLRQG RFWV GLVSDUHGKUHWHLODEWGLV
RU RWKHUZLVH

7KH SURGXFWOLVGHV IJHGH WR EHKWVHWZLWKL RUGXQSDPHQW RU GHYLFHWKDG
HTXLSPHQW RU GHYLFHV ZKLFK UHTXLWIKHKE DIOZLVWOLRXDHEGDEHGHVW
PHGLFDO LQVWUXSARUWHOWLRQHUTRSLSPH RDXFKLHOU UHDFWRIU
GHYLFHV <DQJMLK"RUÄDQ\RFHFSGPR @