



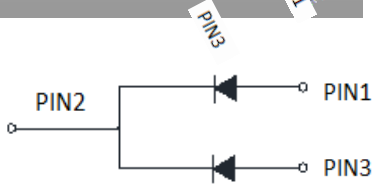

# Ultra-Fast Recovery Diodes 10A FRED

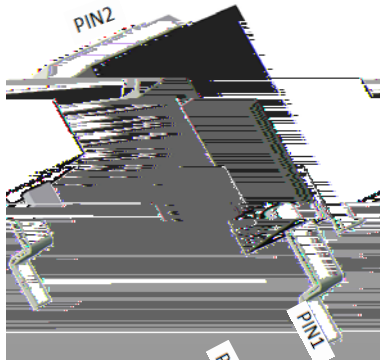

### Features

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity & high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

### Typical Applications

Typical applications are in switching power supplies & converter  
 freewheeling diodes > ESD22-B102  
 Polarity: As marked

### Maximum Ratings (T<sub>a</sub> = 25 °C)

PARAMETER			
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	V	400
Average Rectified Output Current 460Hz sine wave & R-load (FIG.1)	I <sub>o</sub>	A	20M60
Storage Temperature	T <sub>stg</sub>	-	a
-XQFWLRQ 7HPSHUDWXUH	7M	-	a


7\SLFDO -XQFWLRQ FDSDFLWDQFH # pLR (...d†8 °ÖV@\*\$/- VS-



# MURB2040CT

## Electrical Characteristics

PARAMETER	UNIT	TEST CONDITIONS	Min	Typ	Max
-----------	------	-----------------	-----	-----	-----





# MURB2040CT

FIG3: Forward Voltage


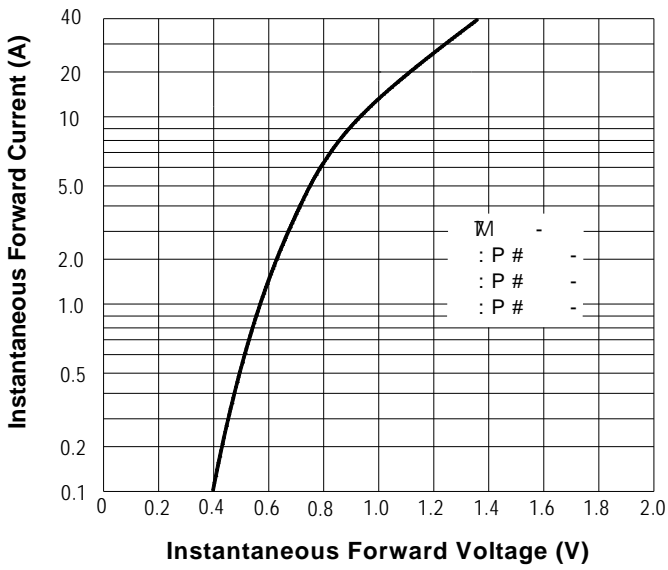


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time



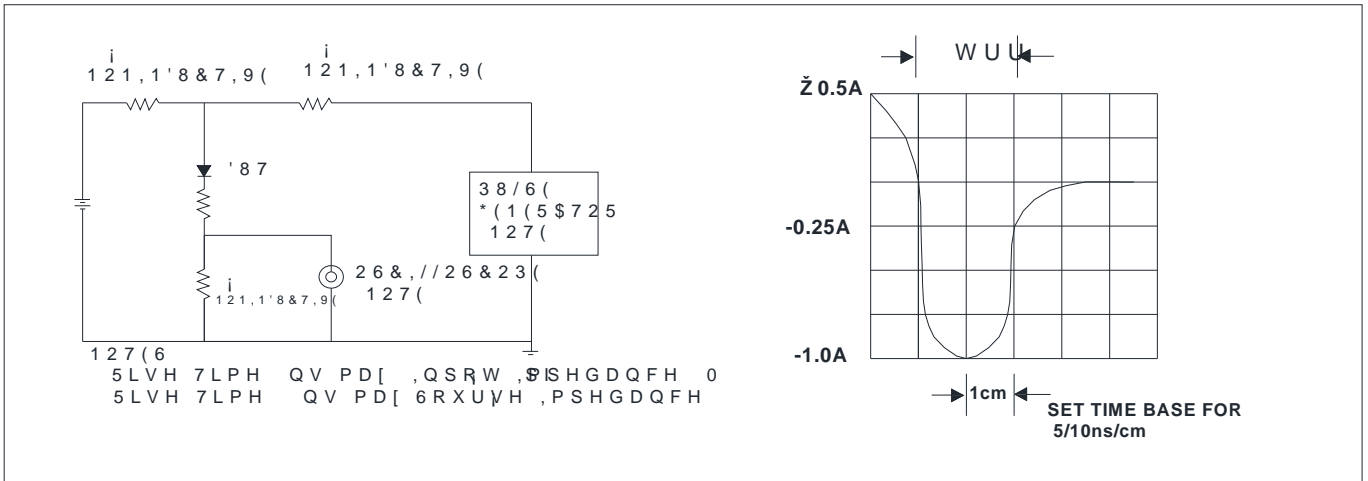

Outline Dimensions

TO-263		
Dim	Min	Max
A	- .5	11.5
B	- . +	10.5
C	, .4	- .0
D	0.2 ,	0.64
E	0.6 ,	0. - 4
F	4.55	5.6
G	4.04	5.10
H	1.14	1.4
I	0	0.2
>	4. -	6.05
K	1. + -	2. + -

Suggested Pad Layout

