





SS10U100P

■ Thermal Characteristics 7D - 8QOHVV RWKHUZZLVH VSHFLILHG

| PARAMETER                            | SYMBOL | UNIT | SS10U100P |
|--------------------------------------|--------|------|-----------|
| 7KHUPDO 5HV LVWDQFH -XQFWERQ WR &DVH |        |      |           |

■ Ordering Information ([DP SOH

| PREFERED P/N | PACKAGE CODE | UNIT WEIGHT(g) | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|--------------|--------------|----------------|----------------------|-------------------------|----------------------------|---------------|
| 66 8 3       | )            | \$SSUR[LPDWH   |                      |                         |                            |               |

■ Characteristics 7\SLFDO


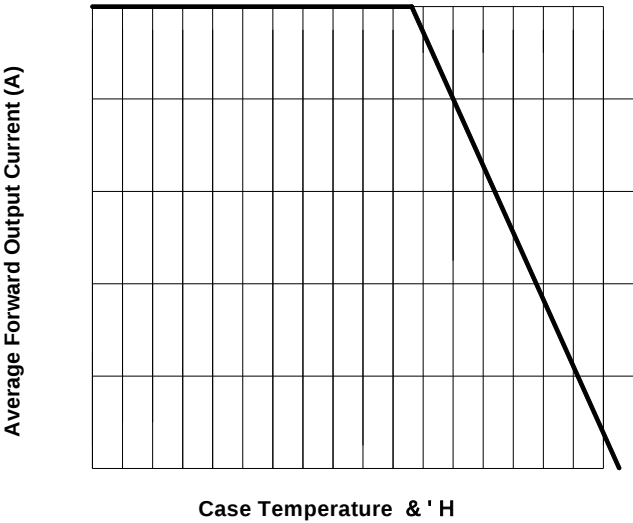


FIG.4: Typical Reverse Characteristics





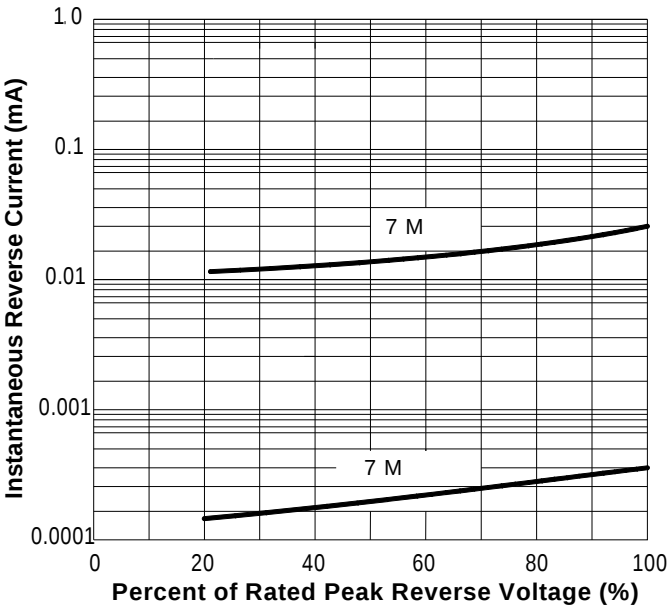

## SS10U100P

---

### Disclaimer

7KH LQIRUPDWLRQ VSHFWXHQWQW LQ WKULUDHQHJKRXFHDPHQOZH FHOHFWURQLF /WHG UHV  
ULJKW WR PDNHWKRXQWKHVS H FRIW RYWSLRQG RFWV GLVSPDURIGHKWHWOLDEWBGWVLJQQF  
RU RWKHUZZLVH

7KH SURGXFWQLVGHV KJHGL WR EH HXVHFWZLRQK RUGXQSRHQW RU GHYLFHWKDQGQ  
HTXLSPHQW RU GHYLFHV ZKLFK UHTXLWKKHE DIOHQVWOLRXDIBOQDEHQHWOK DFKQDOVLIH  
PHGLFDO LQVWUXEHSRUWHDQWRQHUTXLSPEH RDXFHQDU UHVFWRUO FFRQWUFRQOHV DQ  
GHYLFHV <DQJMLHVRW DQKQ H DQVXPLV VRRWHO SRQVLEWHVROVDIQQJGIDRPNMFRXP