





Surface Mount Schottky Rectifier

Features

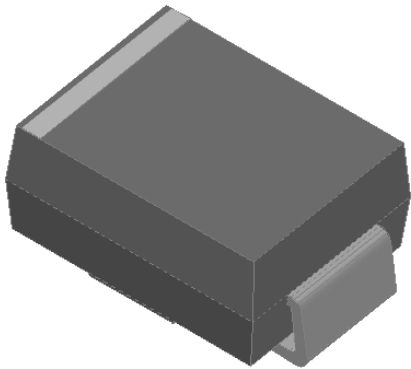

Typical Applications

Mechanical Data
Package



• Polarity:

Maximum Ratings

PARAMETER	SYMBOL	UNIT	SS32B	SS33B	SS34B	SS35B	SS36B	SS38B	SS310B	SS315B	SS320B

Electrical Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SS32B	SS33B	SS34B	SS35B	SS36B	SS38B	SS310B	SS315B	SS320B
			7 D									






SS32B THRU SS320B

Thermal Characteristics

PARAMETER	SYMBOL	UNIT	SS32B	SS33B	SS34B	SS35B	SS36B	SS38B	SS310B	SS315B	SS320B

Characteristics(Typical)

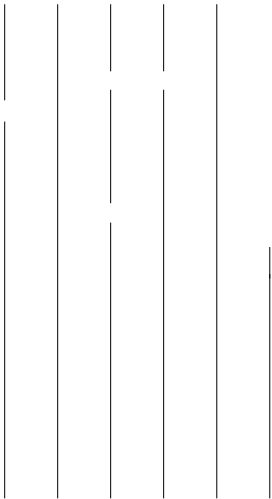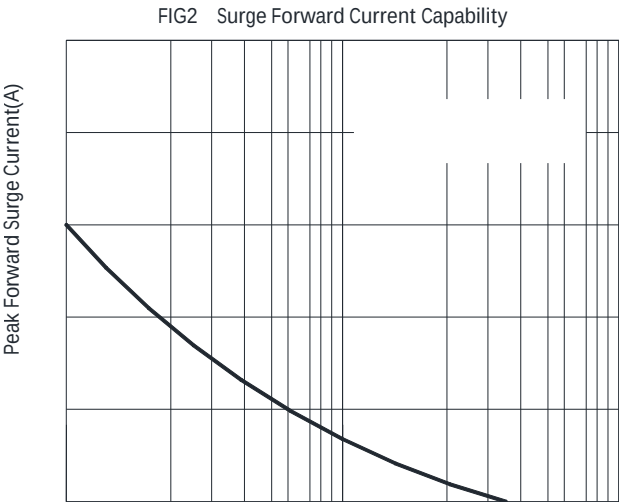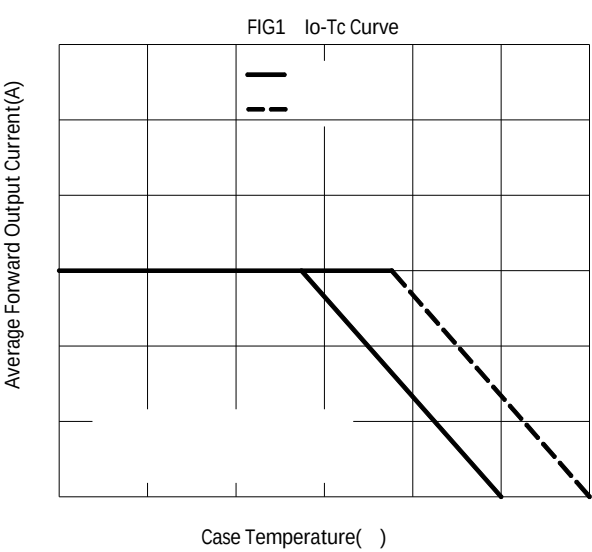



PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS32B-SS320B						
SS32B-SS320B						
SS32B-SS320B						

[illegible]



SS32B THRU SS320B

Disclaimer