



NPN Digital Transistors (Built-in Resistors)

Features

Moisture Sensitivity Level 1

iS SI

ylis rs roratul 1

Mechanical Data

Package: SOT-523

Terminals: Tin plated leads, solderable per
J-STD-002 and JESD22-B102

Marking: E42



DTC123JE

Electrical Characteristics (Ta=25 unless otherwise specified)


ITEM	SYMBOL	UNIT	CONDITIONS	MIN	TYP	MAX
Input voltage	$V_{I(off)}$	V	$V_{CC}=5V, I_o=100\mu A$ $V_o=0.3V, I_o=5mA$	0.5	-	-
	$V_{I(on)}$	V		-	-	1.1
Output voltage	$V_{O(on)}$	V	$I_o / I_i = 5mA / 0.25mA$	-	-	0.3
Input current	I_I	mA	$V_I=5V$	-	-	3.6
Output current	$I_{O(off)}$	μA	$V_{CC}=50V, V_i=0$	-	-	0.5
DC current gain	G_1		$V_o=5V, I_o=10mA$	80	-	-
Input resistance	R_1	k		1.54	2.2	2.86
Resistance ratio	R_2/R_1			17	21	26
Transition frequency	f_T	MHz	$V_o=10V, I_o=5mA$	-	250	-

Ordering Information (Example)

Preferred P/N	Packing Code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
DTC123JE	F2	Approximate 0.0027	3000	30000	120000	7" reel




Characteristics (Typical)

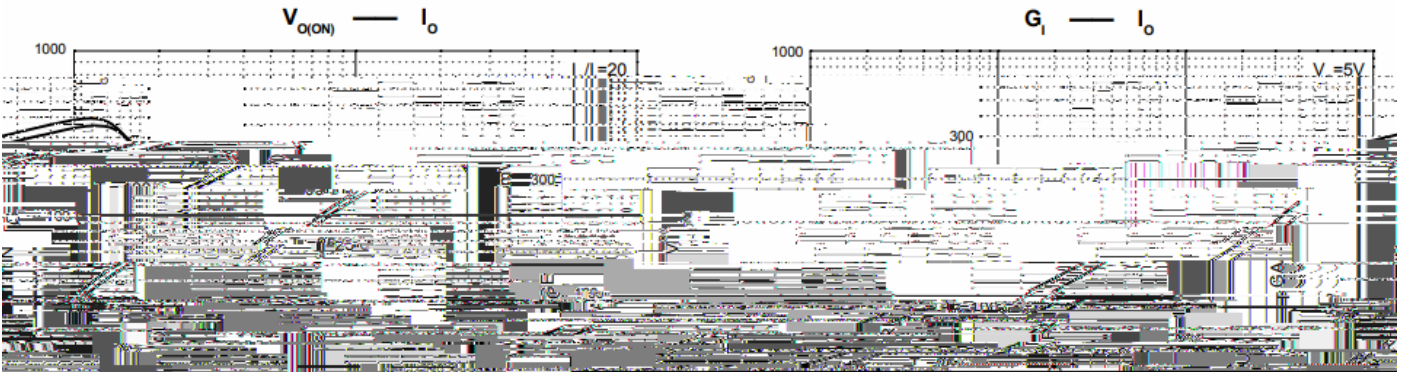



DTC123JE

SOT-523 Package Outline Dimensions

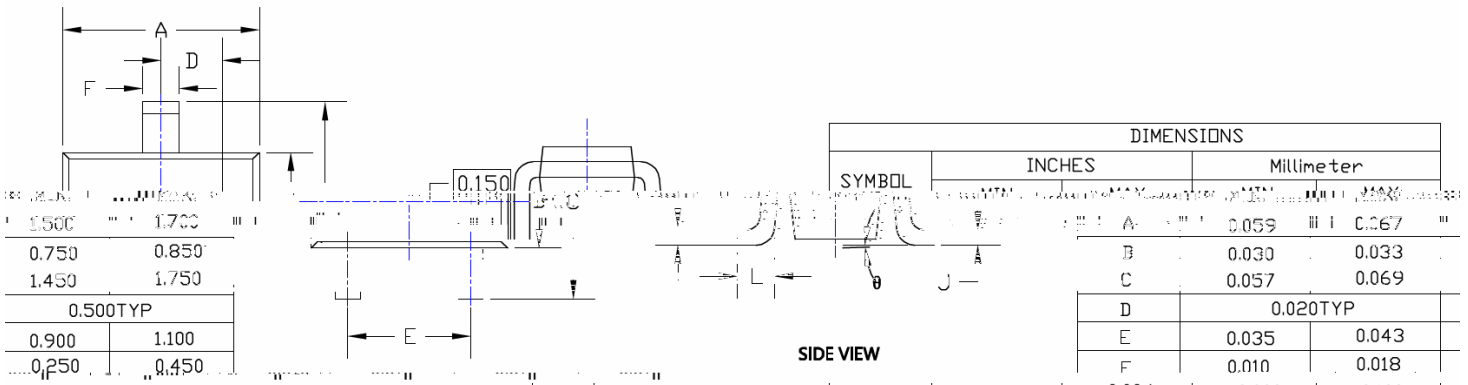

Note:

1. All dimensions are in millimeters (mm) unless otherwise specified.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.